


带调节环的活塞压力开关
PISTON PRESSURE SWITCH WITH ADJUSTING RING

692

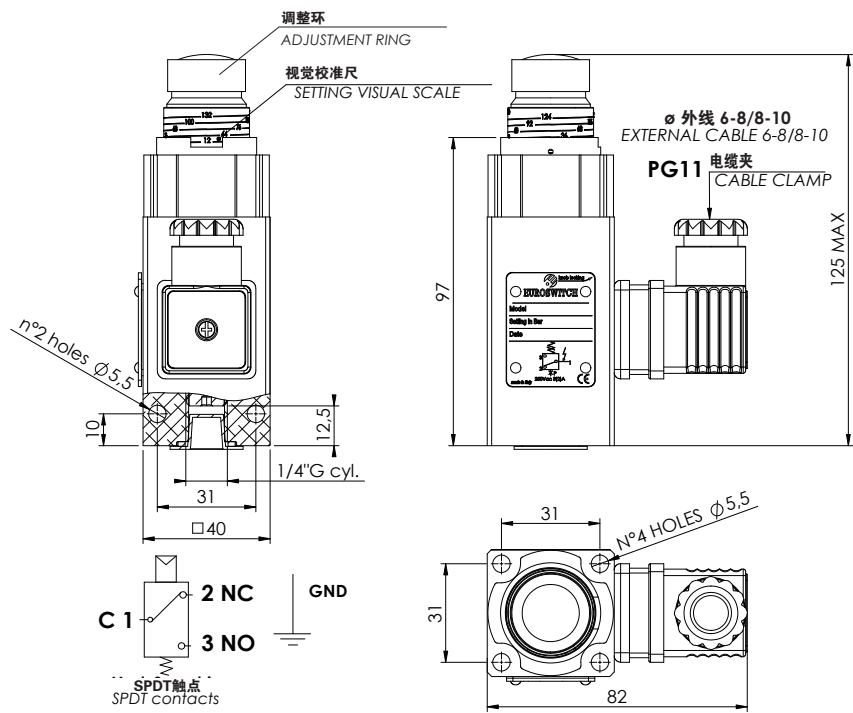

代码 - PART NUMBER	设定范围 / Setting range 巴 bar	下的公差 / Tolerance
692 2 3 0 1 5	8 - 160	± 2%
692 2 3 0 1 6	40 - 400	± 2%

机体	阳极氧化铝
电触点	SPDT 镀银
液体最高温度	100°C
电气特性	5 (4) A / 14 Vdc 4 (3) A / 30 Vdc 5 (3) A / 125 Vac 3 (2) A / 250 Vac
固定迟滞	设定值的~ 10%
最大超压限制	900 巴
启动条件	1B
机械工作寿命	10 <sup>6</sup> 活塞版本
固定	螺纹管连接 - G 1/4" F 螺纹
防护等级	IP65
根据 UNI EN 175301-803 (DIN43650) 带连接器	
密封	NBR+铁氟龙 (见 17 页)
重量	~ 460 g
提供垫片和紧固螺丝	

Case	Anodized aluminium
Electric contacts	SPDT Silver
Max fluid temperature	100°C
Electrical characteristics	5 (4) A / 14 Vdc 4 (3) A / 30 Vdc 5 (3) A / 125 Vac 3 (2) A / 250 Vac
Fixed hystereis	approximately 10% of setting value
Max Overpressure limit	900 bar
Action type	1B
Mechanical working life	10 <sup>6</sup> operations
Fixing	Manifold connection - G 1/4" F
Protection degree	IP65
with connector according to UNI EN 175301-803 (DIN43650)	
Seal	NBR+Teflon (see page 17)
Weight	~ 460 g
Supplied with gasket and fixing screws	

请参阅Euroswitch20-03-1压力开关目录册，第11-15页的一般说明，以便正确使用。For a correct use please refer to "General Notes" in the pressure switches Euroswitch catalogue 20-03-1, p. 11-15. 本公司保留随时修改产品技术特征或停止生产的权利，恕不另行通知。The Company reserves the right to modify the technical features of the products or halt production at any time without notice.